




"PROVIDING DISTINCT SOLUTIONS"

QTJ4 35 SEMI AUTOMATIC HOLLOW BLOCK MACHINE

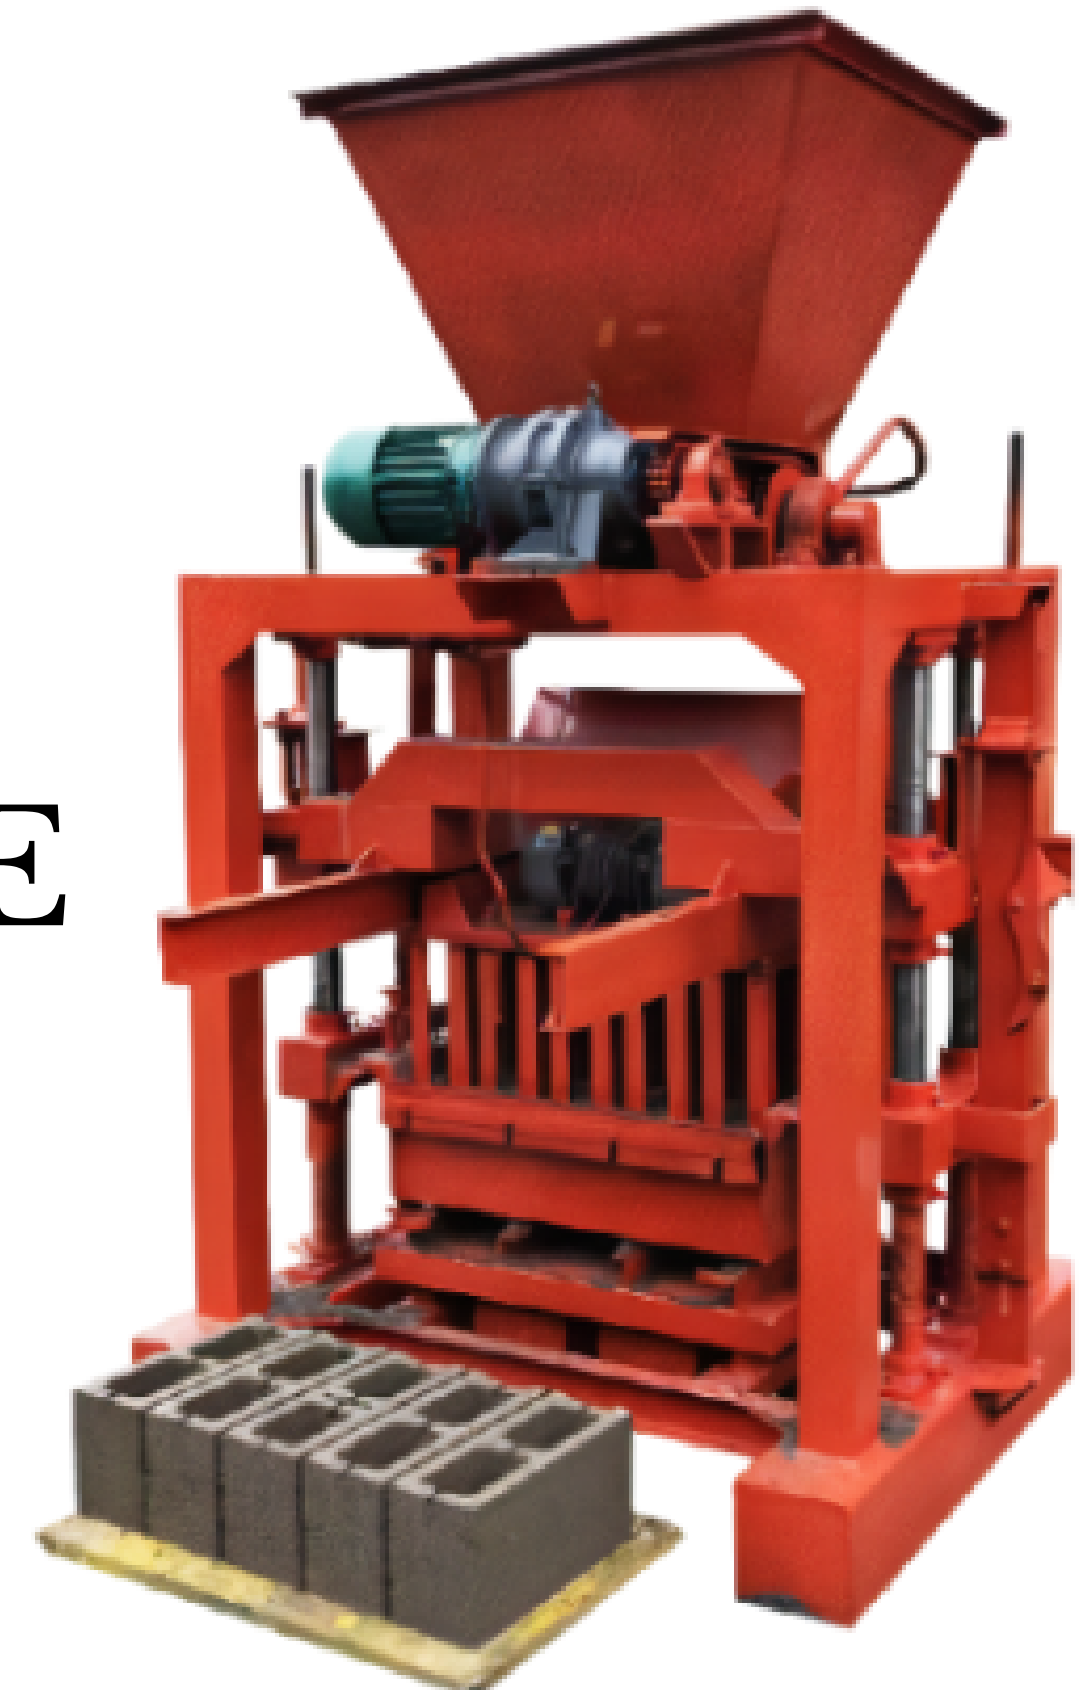

PRE-ORDER

50% Down payment/ 50% Full payment 10 days before the arrival

Lead time 45-60days ETA

Our quotation is exclusive of vat

Set up

Delivery- the client will pick up the unit in Davao port


Specs/Details



MIXER



SPARE PARTS

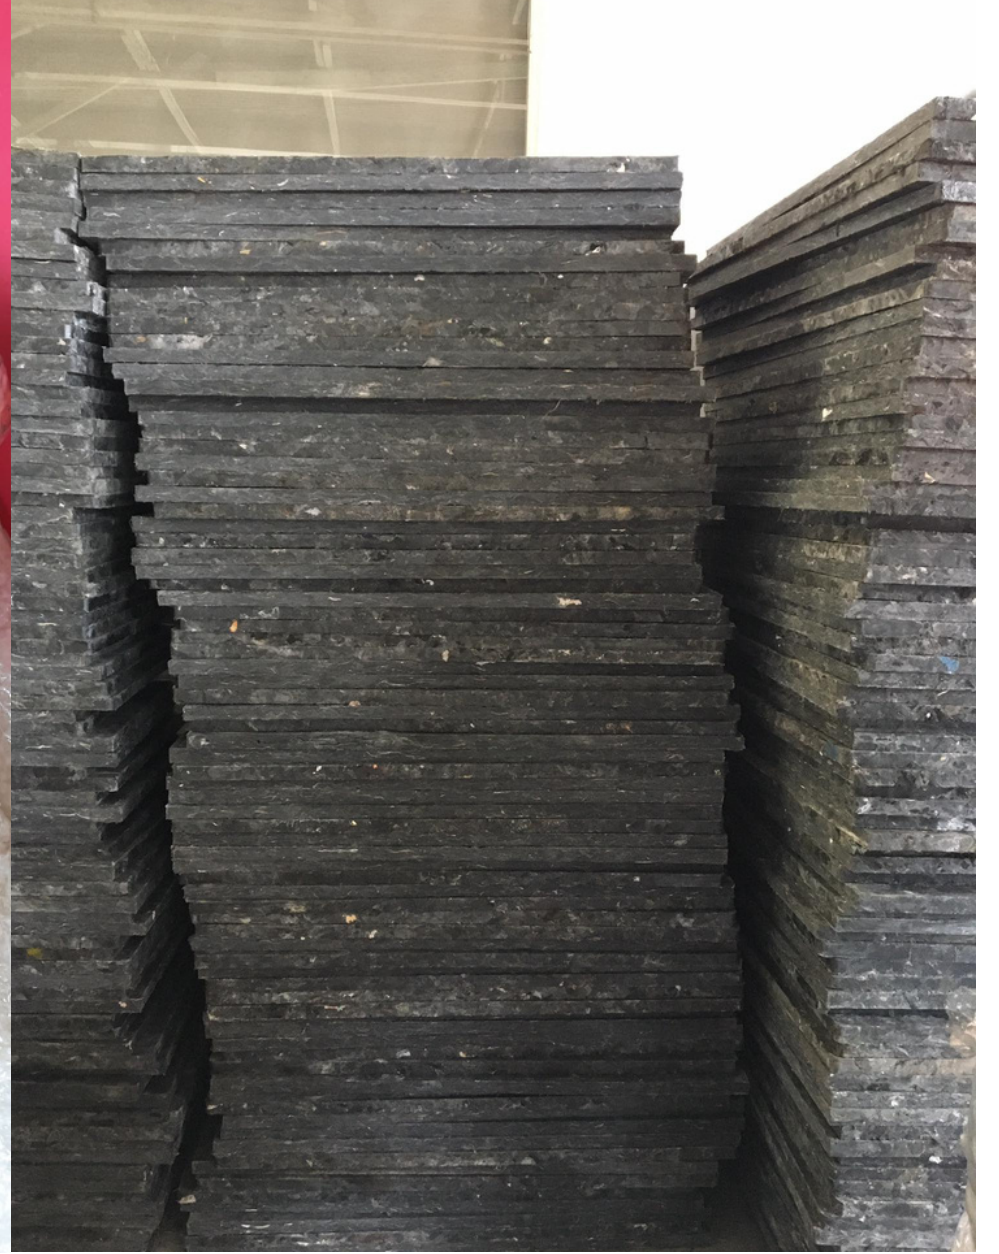

**FIBER
PALLETS**

TROLLEYS & CONVEYOR



HOST MACHINE




EXTRA MOULD



1	German-tech block machine QTJ4-35	Host machine	QTJ4-35
		Total power	10.45KW
		Free mould	Normal hollow or solid brick
2	Control unit	Semi automatic	
3	JQ350 Mixer	Input Capacity	560L
		Output Capacity	350L
		Dimension	φ1200x1160mm
		Power	7.5kw
4	Belt conveyor	Length	6m
		Motor	1.1kw

1








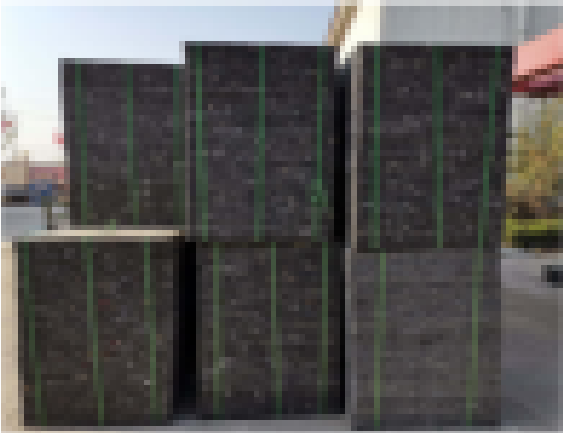5	Extra mould	Hollow block or solid brick 1.1kw		1		
6	Hand trolley	To transfer finished blocks		2	free	
7	Fiber pallets	850x450x20mm				
8	Tools bag	Match with 4-35		1	free	
	Spare parts	Match with 4-35		1	free	

QTJ4-35 Semi-auto Concrete block making machine

Main Technical Parameters		
No.	Items	Parameters
1	Host machine max.size	2200x1700x2700m
2	Molding form	Pressure head and platform Vibration
3	Vibration frequency	2800r/m
4	Pallet size	850x450x20mm
5	Molding cycle	35s/time
6	Host machine Power	10.45kw
7	Vibration force	28KN
8	Host machine weight	1230kg
9	Total land	300-600m ²

10	Workers	2
11	Applied products	Hollow block, solid brick, porous brick, paving and interlocking brick, curbstone, etc
12	Raw materials	Crushed stone, stone powder, sand, construction wastes, fly ash, slag, cement, etc.

Main products and specifications					
NO.	Size (L*W*H) mm	Reference Pic.	Pcs/ mould	Pcs/Hour	Pcs/10H
1	400x100x200mm		7	400	4000
2	400x150x200mm		5	300	3000
3	400x200x200mm		4	250	2500
4	240x115x53mm		24	1500	1500
5	240x115x90mm		9	500	5000

Concrete Blocks

4 INCHES



6 INCHES



Raw Materials Mixtures

STANDARD

CEMENT- 10%



GRAVEL- 60%

SAND- 30%

WATER- 3%

REMARKS: TRIAL & ERROR FOR MIXING OF RAW MATERIALS

Set up of the machine

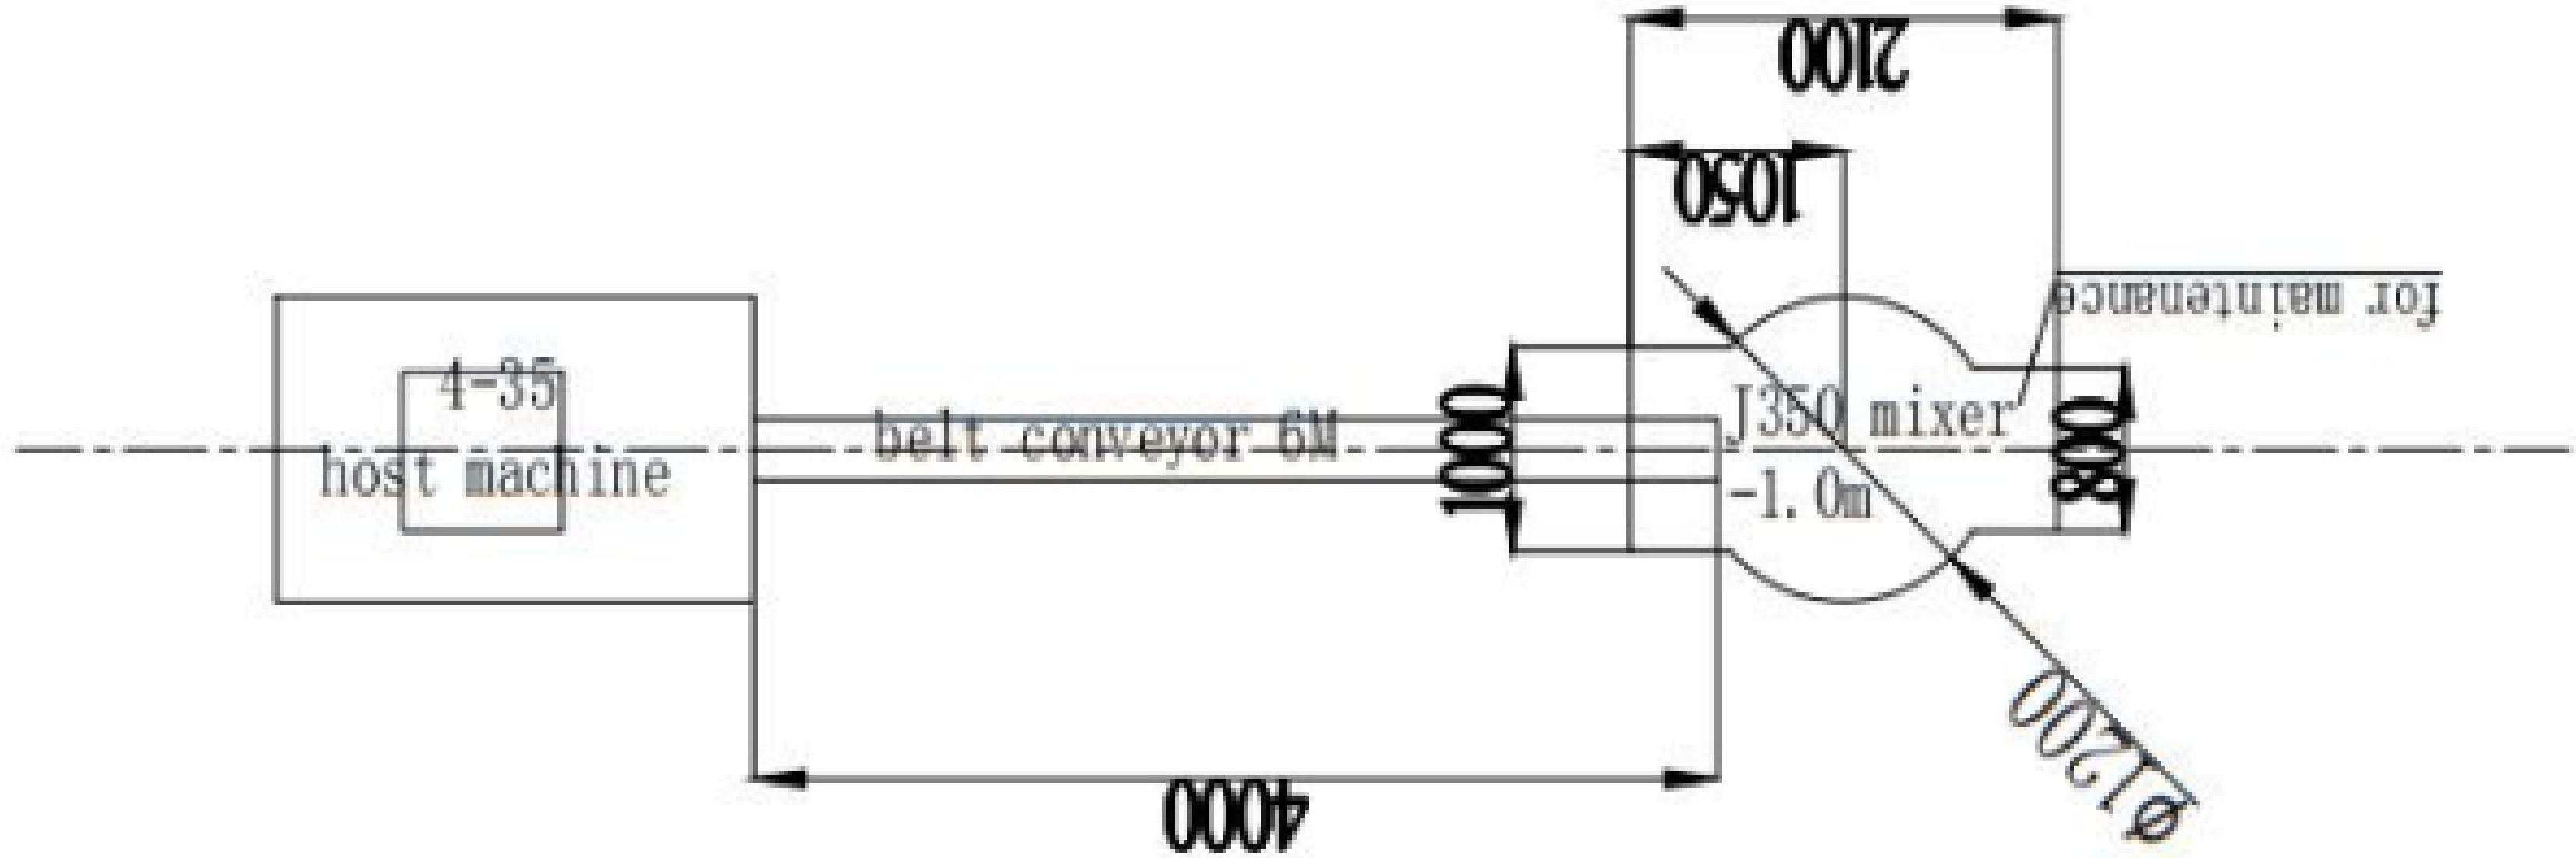

ORDER

PREPARE (SITE)

Client should have an in House Electrician

ORIENTATION

MAINTAINANCE



WE REQUIRE

- that the site should be ready, with proper flooring and ceiling
- that the customer should have an in-house engineer or electrician
- Transformer (3 PHASE motor)



TERMS AND CONDITION



- 1 YEAR WARRANTY if no FACTORY DEFECT
- WARRANTY will be VOID IF ITS USER'S FAULT
- OR ANYTHING THAT IS NOT IN THE MANUAL



We at Limitech, we provide distinct solutions to our clients.

- We will guide you on how to set up and start the machine based on the manual
- the client has to be careful and should follow what is in the manual.
- We will give the standard mixture but the clients will do the proper mixture on their own machine by trial and error.

Our Clients

- Calinan
- Cagayan de Oro
- Bukidnon
- Tacurong



Machine Orientation

- The Client Should Setup the Machine First
- Area (Fit for Production)
- Wirings
- Orientation (Office and Via Zoom)
- Site Visit (Pictures and Vidoes)